



Maintenance after use | T1 | 21370


Page 1 of 2

Maintenance recommendations:

After use (every time)

- **Wear full protective gear during maintenance.**
- **Always act according to the safety instructions as supplied with each tool!**

Necessary equipment: Teflon lubrication oil, WD40, soft cloth.

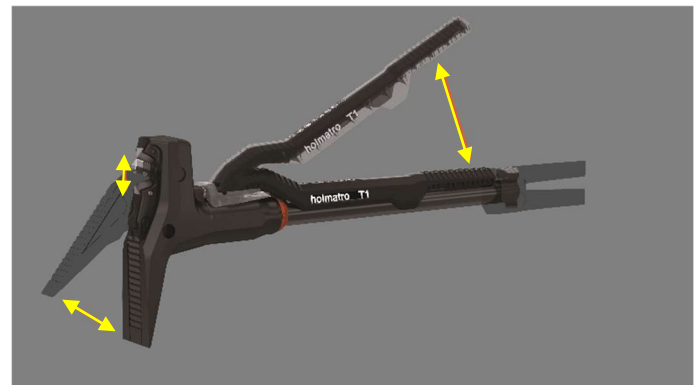

Step 1


- Check:
 - Its general condition
 - Oil leakage
 - Damages that can interfere with functioning or safety
 - Dirt: clean if necessary
 - Readability of the identification / safety label, replace if unreadable

Step 2

- Check the proper functioning of the pump rod and lever
- Check:
 - moves smoothly (without pushing or friction)
 - easily returns to neutral position

Holmatro Rescue Equipment B.V. | P.O. Box 33 | 4940 AA Raamsdonksveer, the Netherlands | T +31 (0)162 589200 | rescue@holmatro.com | www.holmatro.com

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. N.V. Holmatro and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro. Nothing from this printed matter can be copied and/or made public in any way without the explicit authorization of Holmatro.

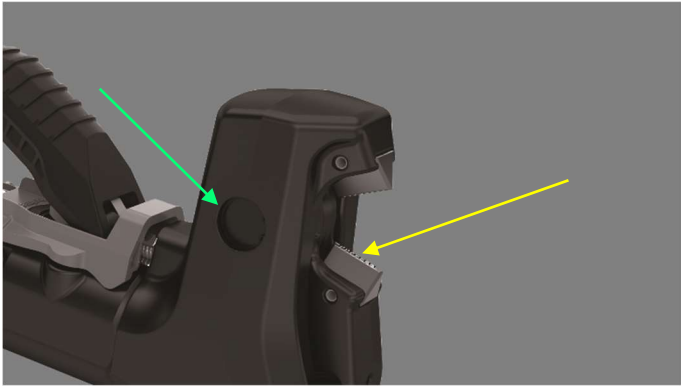

Step 3

- Clean the hinges and grease them with Teflon oil. (also the opposite sides)
- Check the snap ring of the hinge pin for damage:
 - Damaged
 - Corroded
 - Worn down
- Clean the hinges and grease them with Teflon oil. (also the opposite sides)
- Check the blades for damage



Step 4

- Check the wedge for damage and spray Teflon lubricating oil on the push button while operating
- Check the toe and body for damage.
- Spray WD40 on the tips to prevent corrosion.



Step 5

- Check that the toe and body are in completely closed position and store the tool.